


Lava Brown™ CLOTHING



Lava Brown™ products are made of high quality A-grade side split cow leather

44-7300 Jacket full leather

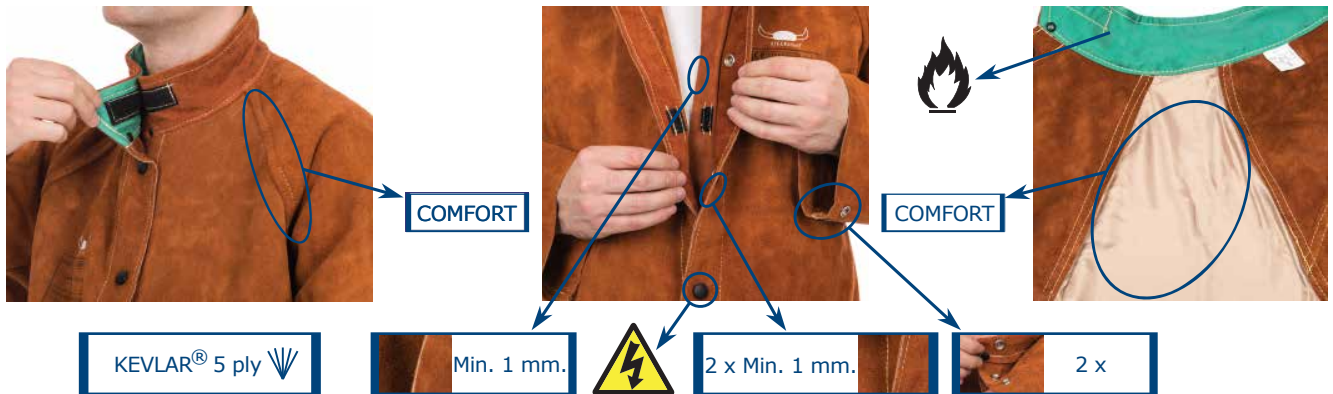

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001




**EN ISO 11611:2015
CLASS 2/A1+A2**

	76 cm.	100 cm.
44-7300M	81 cm.	112 cm.
44-7300L	86 cm.	124 cm.
44-7300XL	91 cm.	136 cm.
44-7300XXL	96 cm.	148 cm.
44-7300XXXL	96 cm.	160 cm.

44-7300/P Jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./m²



EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

	76 cm.	100 cm.
44-7300M/P	81 cm.	112 cm.
44-7300L/P	86 cm.	124 cm.
44-7300XL/P	91 cm.	136 cm.
44-7300XXL/P	96 cm.	148 cm.

Lava Brown™ CLOTHING

44-7300/P-AQ Ladies jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./m²

	↕	
44-7300S/P-AQ	76 cm.	98 cm.
44-7300M/P-AQ	76 cm.	110 cm.
44-7300L/P-AQ	81 cm.	120 cm.
44-7300XL/P-AQ	86 cm.	130 cm.



EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

44-7800 Cape sleeve



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7800M	100 cm.
44-7800L	112 cm.
44-7800XL	124 cm.
44-7800XXL	136 cm.
44-7800XXXL	148 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-78.. Apron for cape sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

	↕	↔
44-7820	51 cm.	56 cm.
44-7828	71 cm.	56 cm.
44-7836	91 cm.	56 cm.
44-7836XL	120 cm.	80 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**



Lava Brown™ CLOTHING

44-7248

Pants with breast protection and open back

44-7440

Pants with open back



122 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



102 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7440/7600

Pants with closed back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7600M
44-7440/7600L
44-7440/7600XL
44-7440/7600XXL
44-7440/7600XXXL

110 cm.
112 cm.
116 cm.
122 cm.
128 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7440/7648

Pants with breast protection and closed back, bib and brace



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7648M
44-7440/7648L
44-7440/7648XL
44-7440/7648XXL
44-7440/7648XXXL
44-7440/7648XXXXL

136 cm.
140 cm.
144 cm.
148 cm.
152 cm.
156 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

Lava Brown™ CLOTHING

44-71.. Apron



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

44-7124	60 cm.	60 cm.
44-7136	91 cm.	60 cm.
44-7142	107 cm.	60 cm.
44-7142 W	107 cm.	80 cm.
44-7148	122 cm.	60 cm.
44-7148 W	122 cm.	80 cm.

COMFORT



44-7124
60x60 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



EN ISO 11611:2015
CLASS 2/A1+A2

44-7023 Sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Balancing strap system

44-7023

58 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



EN ISO 11611:2015
CLASS 2/A1+A2

44-7028 Heavy duty arm guard (piece)



- Heavy duty
- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- COMFOflex® lining used
- Hook and loop closure
- Inside 520 gr./m² flame retardant fabric
- See for extension 44-7114EXT (page 18)

44-7028

35 cm. 32-41 cm. 35-45 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



EN ISO 11611:2015
CLASS 2/A1+A2

Lava Brown™ CLOTHING

44-7106 Spats for shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-7106

33-43 cm. 15 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7114 Spats for leg and shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation
- See for extension 44-7114EXT

44-7114

37-47 cm. 36 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**


44-7114EXT Diameter extension for 44-7114 and 44-7028



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- 15 cm. wide extension for 44-7114 and 44-7028

44-7114EXT

15 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

COMFOflex[®]

SOFTouch[™]

DEERSOsoft[®]

ThunderingBison[™]

TURMOflex[®]

Lava Brown[™]

STEERSOtuff[®]

Arc Knight[®]

Arc Queen[™]

Golden Brown[™]

Fire Fox[™]

Yellowjacket[®]

SWEATSOpad[®]

COMBOframe[™]

LAVAshield[®]

PYTHONrap[™]

Glove Medic[™]

Golden Brown™ CLOTHING



KEVLAR® 3 ply √



Min. 1 mm.

2 x Min. 1 mm.



1 x

Golden Brown™ products are made of high quality side split or grain cow leather
 Golden Brown™ split leather products: pages 20, 21, 22, 23. Grain leather products: page 24.

44-2530/P Jacket with flame retardant back



- Side split cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 305 gr./m²

- 44-2530M/P
- 44-2530L/P
- 44-2530XL/P
- 44-2530XXL/P
- 44-2530XXXL/P

	76 cm.	100 cm.
	81 cm.	112 cm.
	86 cm.	124 cm.
	91 cm.	136 cm.
	96 cm.	148 cm.



EN ISO 11611:2015
 CLASS 1/A1+A2
 TÜV BP 60132808 0001
 TÜV 60141016 001



**EN ISO 11611:2015
 CLASS 1/A1+A2**

44-2847 Shoulder apron



- Side split cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.

- 44-2847M
- 44-2847L
- 44-2847XL

	92 cm.	53 cm.
	92 cm.	58 cm.
	92 cm.	63 cm.



EN ISO 11611:2015
 CLASS 2/A1+A2
 TÜV BP 60132827 0001
 TÜV 60150123 001



**EN ISO 11611:2015
 CLASS 2/A1+A2**

Golden Brown™ CLOTHING

44-2800 Cape sleeve



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2800L
44-2800XL
44-2800XXL

112 cm.
124 cm.
136 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-28.. Apron for cape sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2828
44-2836

71 cm. 56 cm.
91 cm. 56 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-21.. Apron



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

44-2136
44-2142
44-2142 W

91 cm. 60 cm.
107 cm. 60 cm.
107 cm. 80 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

Golden Brown™ CLOTHING

44-2600 Pants



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2600M
44-2600L
44-2600XL

↑↓
110 cm.
112 cm.
116 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-2648 Pants with breast protection, bib and brace



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2648M
44-2648L
44-2648XL
44-2648XXL

↑↓
136 cm.
140 cm.
144 cm.
148 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-2321, 44-2321XL Sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Hook and loop closure at the top
- Wrist-end with elastic band included

44-2321
44-2321XL



52 cm.
52 cm.



21-31 cm.
21-31 cm.



34-47 cm.
45-60 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

Golden Brown™ CLOTHING

44-2106 Spats for shoe protection



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-2106

33-43 cm. 15 cm.



Golden Brown™

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-2114 Spats for leg and shoe protection



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-2114

37-47 cm. 36 cm.



Golden Brown™


EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60132827 0001
TÜV 60150123 001



**EN ISO 11611:2015
CLASS 2/A1+A2**



Golden Brown™ CLOTHING

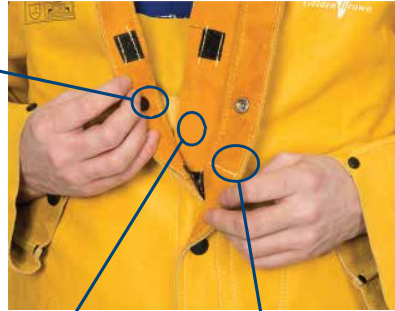

KEVLAR® 3 ply √

Min. 1 mm.

2 x Min. 1 mm.

1 x

Golden Brown™ products are made of high quality side split or grain cow leather
Golden Brown™ split leather products: pages 20, 21, 22, 23. Grain leather products: page 24.

44-5530 Jacket full leather



- Grain cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
 CLASS 2/A1+A2
 TÜV BP 60132801 0001
 TÜV 60140939 001



**EN ISO 11611:2015
 CLASS 2/A1+A2**

- 44-5530L
- 44-5530XL
- 44-5530XXL
- 44-5530XXXL

↑↓		81 cm.	112 cm.
		86 cm.	124 cm.
		91 cm.	136 cm.
		96 cm.	148 cm.

44-5600 Pants with breast protection, bib and brace



- Grain cow leather
- KEVLAR® 3 ply √
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
 CLASS 2/A1+A2
 TÜV BP 60132801 0001
 TÜV 60140939 001



**EN ISO 11611:2015
 CLASS 2/A1+A2**

- 44-5600L
- 44-5600XL
- 44-5600XXL
- 44-5600XXXL

↑↓	140 cm.
	144 cm.
	148 cm.
	152 cm.

Yellowjacket® CLOTHING



KEVLAR® 3 ply ✓



Min. 1 mm.

305 gr./m²



1 x

Yellowjacket® product is made of 305 gr./m² flame retardant cotton body and split cow leather sleeves

33-3060 Jacket, flame retardant cotton with leather sleeves



- 305 gr./m² flame retardant cotton body
- split cow leather sleeves
- KEVLAR® 3 ply ✓

Yellowjacket®

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60132808 0001
TÜV 60141016 001



33-3060S	76 cm.	108 cm.
33-3060M	76 cm.	116 cm.
33-3060L	81 cm.	127 cm.
33-3060XL	86 cm.	138 cm.
33-3060XXL	91 cm.	147 cm.
33-3060XXXL	96 cm.	158 cm.
33-3060XXXXL	96 cm.	168 cm.



**EN ISO 11611:2015
CLASS 1/A1+A2**

Arc Knight® CLOTHING



KEVLAR® 3 ply √



520 gr./m²



Double material



1 x

Arc Knight® 38-4350, 38-4355, 38-44.. and 38-4340 are made of heavy duty 520 gr./m² FR cotton with split cow leather reinforcement.

Arc Knight® 38-4330, 38-4335, 38-4375, 38-4328, 38-43.., 38-4360 and 38-4321XL are made of heavy duty 520 gr./m² FR cotton.

38-4350 Jacket with leather reinforcement



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton with black split cow leather reinforcement
- KEVLAR® 3 ply √
- Sleeve with double closure



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

	76 cm.	96 cm.
38-4350M	81 cm.	104 cm.
38-4350L	86 cm.	112 cm.
38-4350XL	91 cm.	120 cm.
38-4350XXL	96 cm.	128 cm.

38-4330 Jacket



44-7820
44-7828
44-7836
44-7836XL
(see page 15)



38-4320
(see page 28)



44-2828
44-2836
(see page 21)

- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply √
- Possibility to add a *Lava Brown™* or *Golden Brown™* apron to this jacket



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

	76 cm.	96 cm.
38-4330M	81 cm.	104 cm.
38-4330L	86 cm.	112 cm.
38-4330XL	91 cm.	120 cm.
38-4330XXL	96 cm.	128 cm.

Arc Knight® CLOTHING

38-4335 Jacket, high visibility



- High visibility
- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply √
- Available in size:
M, L, XL, XXL, XXXL

38-4355 Jacket, high visibility



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
EN ISO 20471:2013
+ A1:2016 clause 6
TÜV BP 60122567 0003
TÜV 21260757 003

38-4375 Lab coat



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply √

38-4375M
38-4375L
38-4375XL
38-4375XXL

↑ ↓		96 cm.
	114 cm.	104 cm.
	114 cm.	112 cm.
	114 cm.	120 cm.

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

EN ISO 11611:2015
CLASS 2/A1+A2

38-4328 Cape sleeve



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply √

38-4328M
38-4328L
38-4328XL
38-4328XXL
38-4328XXXL

↑		96 cm.
	104 cm.	
	112 cm.	
	120 cm.	
	128 cm.	

Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003

EN ISO 11611:2015
CLASS 2/A1+A2

Arc Knight® CLOTHING

38-4320 Apron for cape sleeve



- High comfort and flexibility
- Black split cow leather
- KEVLAR® 3 ply

38-4320

51 cm.

56 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

38-43.. Apron



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply
- Self-balancing strap system

38-4336
38-4342
38-4342 W

91 cm.
107 cm.
107 cm.

60 cm.
60 cm.
80 cm.

COMFORT



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

38-44.. Apron with leather reinforcement



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton with black split cow leather reinforcement
- KEVLAR® 3 ply
- Self-balancing strap system

38-4436
38-4442
38-4442 W

91 cm.
107 cm.
107 cm.

60 cm.
60 cm.
80 cm.

COMFORT



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

Arc Knight® CLOTHING

38-4360 Pants



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply ✓

38-4360M	79 cm.
38-4360L	81 cm.
38-4360XL	83 cm.
38-4360XXL	85 cm.

- Possibility to add knee pads

38-4380M	136 cm.
38-4380L	140 cm.
38-4380XL	144 cm.
38-4380XXL	148 cm.
38-4380XXXL	152 cm.

38-4380 Pants, breast protection, bib and brace



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

38-4340 Pants with leather reinforcement, breast protection, bib and brace



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton with black split cow leather reinforcement
- KEVLAR® 3 ply ✓

38-4340M	136 cm.
38-4340L	140 cm.
38-4340XL	144 cm.
38-4340XXL	148 cm.
38-4340XXXL	152 cm.



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

38-4321XL Sleeves



- High comfort and flexibility
- Heavy duty 520 gr./m² FR cotton
- KEVLAR® 3 ply ✓

38-4321XL	52 cm.	21-31 cm.	45-60 cm.
-----------	--------	-----------	-----------



Arc Knight®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60122567 0001
TÜV 21260757 003



**EN ISO 11611:2015
CLASS 2/A1+A2**

Fire Fox™ CLOTHING

KEVLAR® 3 ply √

305 gr./m²

Double material

1 x

Fire Fox™ clothing is made of 305 gr./m² flame retardant cotton

33-2300 Jacket



- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply √
- Possibility to add a *Lava Brown™* or *Golden Brown™* apron to this jacket



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148715 0001
TÜV 60332344 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

44-7820
44-7828
44-7836
44-7836XL
(see page 15)

44-2828
44-2836
(see page 21)

38-4320
(see page 28)

	↑ ↓	
33-2300M	76 cm.	96 cm.
33-2300L	81 cm.	104 cm.
33-2300XL	86 cm.	112 cm.
33-2300XXL	91 cm.	120 cm.
33-2300XXXL	96 cm.	128 cm.

33-2600 Pants



- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply √
- Possibility to add knee pads



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148715 0001
TÜV 60332344 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

33-2600M	79 cm.
33-2600L	81 cm.
33-2600XL	83 cm.
33-2600XXL	85 cm.
33-2600XXXL	87 cm.



Fire Fox™ CLOTHING

33-2700 Pants with breast protection, bib and brace



- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

33-2700M
33-2700L
33-2700XL
33-2700XXL
33-2700XXXL



79 cm.
81 cm.
83 cm.
85 cm.
87 cm.



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148715 0001
TÜV 60332344 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

33-2800 Coverall



- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads

33-2800M
33-2800L
33-2800XL
33-2800XXL
33-2800XXXL



176 cm.
180 cm.
184 cm.
188 cm.
196 cm.




Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148715 0001
TÜV 60332344 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

33-2320 Sleeves

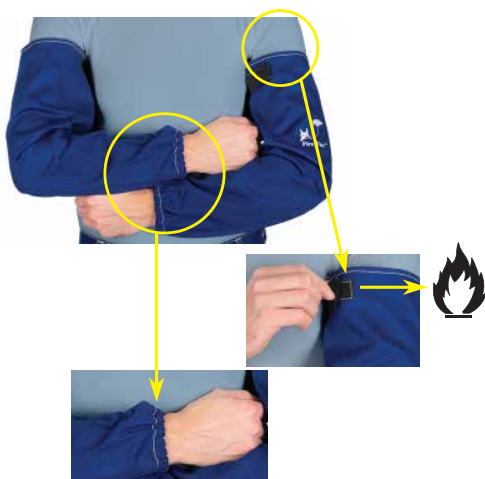

- 305 gr./m² flame retardant cotton
- KEVLAR® 3 ply

33-2320 52 cm. 19-32 cm. 36-47 cm.



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148740 0001
TÜV 60343261 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

Fire Fox™

FR COTTON CAPS

23-*514 FR Cap



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148742 0001
TÜV 60341060 001



EN ISO 11611:2015
CLASS 1/A1+A2

23-*515 FR Cap



Choose the best size for all caps:
* = 1, 2, 3, 4, 5, 6, 7

Size	Articlenumber	
7	23-1xxx	56 cm.
7 1/8	23-2xxx	57 cm.
7 1/4	23-3xxx	58 cm.
7 3/8	23-4xxx	59 cm.
7 1/2	23-5xxx	60 cm.
7 5/8	23-6xxx	61 cm.
7 3/4	23-7xxx	62 cm.



COMFORT



COTTON CAPS

23-*503 Camouflage



23-*507 USA flag



23-*524 Wild



Fire Fox™

FR BEANIE

23-8000 FR Beanie



- Often used in combination with helmet
- High comfort and flexibility
- 305 gr./m² flame retardant cotton



Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148742 0001
TÜV 60341060 001



EN ISO 11611:2015
CLASS 1/A1+A2

23-8000L 56-59 cm.
23-8000XL 59-62 cm.



Fire Fox[™]

FR COTTON DOO-RAGS

23-3612 FR Doo-Rag



23-3613 FR Doo-Rag



Fire Fox[™]

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148742 0001
TÜV 60341060 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

23-3611 FR Doo-Rag



23-3615 FR Doo-Rag



- Often used in combination with helmet
- High comfort and flexibility
- Sweatband integrated in the front of the Doo-Rag
- 305 gr./m² flame retardant cotton

All Doo-Rags, one size fits all:

46-68 cm.

COTTON DOO-RAGS

23-3601 Camouflage



23-3602 Wild



23-3604 USA flag



23-3606 Happy Hour



23-3607 Paradise



23-3609 European flag



Fire Fox™

FR HELMET HOODS

23-6680, 23-6680XL

23-6680/LV

23-6690



- Connectable to helmet gear
- Hook and loop closure
- 305 gr./m² flame retardant cotton




Fire Fox™

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148742 0001
TÜV 60341060 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

23-6680 / 23-6680LV / 23-6690: 64 cm.
23-6680XL: 68 cm.



23-6680: 41 cm.
23-6690: 41 cm.
23-6680XL: 44 cm.
23-6680/LV: 62 cm.

23-6680 / 23-6680LV / 23-6690: 42 - 53 cm.
23-6680XL: 52 - 65 cm.

Multiple sizes and lengths

Arc Knight®

LEATHER HELMET HOOD

23-6630



- Hook and loop closure
- Black split cow leather with 520 gr./m² flame retardant cotton
- Available in size L and XL
- KEVLAR® 3 ply



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60133477 0001
TÜV 60142905 001



**EN ISO 11611:2015
CLASS 2/A1+A2**



TURMOflex[®]

WINTER HELMET LINERS

23-7766



- Connectable to helmet gear
- Hook and loop closure
- 305 gr./m² flame retardant cotton
- *COMFOflex*[®] lining



TURMOflex[®]

EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60148742 0001
TÜV 60341060 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

23-7702



23-7733



23-7711



before washed




"Most comfortable sweatband in the world"



SWEATSOpad®

HELMET COMFORTER

- Helmet pad and sweatband combined in one piece air cushioned *SWEATSOpad®*
- Flame retardant
- No more "helmet head"!
- No more slippage!
- No more sweat!

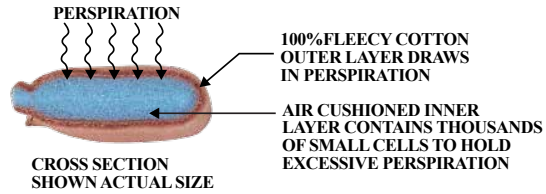

20-3100V, 20-3100V/17



20-3100V 22 cm.
20-3100V/17 17 cm.

SWEATSOpad®

EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001



20-3200V



20-3200V 25 cm.

SWEATSOpad®

EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001




20-3300V



20-3300V 14 cm.

SWEATSOpad®

EN ISO 11611:2003
CLAUSE 6.6
TÜV AK 60013119 0001
TÜV 21120493 001



LEATHER HELMET CAPS AND BIBS

44-7180




- Grain leather helmet cap
- Black grain cowhide
- Will fit over the helmet gear and can be attached with hook and loop to the top of the helmet gear.

44-7181



- Grain leather back neck protection
- Black grain cowhide
- Made to be attached with hook and loop to the cap (= art.nr. 44-7180)

- Dimensions:




44-7182



- Grain leather front neck protection
- Black grain cowhide
- Can be attached with hook and loop to the helmet inside or outside

- Dimensions:




44-7184



- Split leather Front neck protection
- Black split cowhide
- Can be attached with hook and loop to the helmet inside or outside

- Dimensions:



ACCESSORIES

44-7111



- Foldable inspector mask
- Fits glass: 110 x 50 mm.
- Glass not included

KEVLAR® 3 ply ✓




16 cm.

44-7110



- Electrode bag with hanging system
- To be filled with max. 2 kg. electrodes
- Double leather construction

KEVLAR® 3 ply ✓



8 cm.

38 cm.

ACCESSORIES


44-3006LB, 44-3006LB/PR



- High heat reflective handshield
- Split cowhide leather back with **aluminized PFR front**
- Also available in pairs (44-3006LB/PR)

All handshields:
EN ISO 11611:2015
TÜV 60353593-002


KEVLAR® 5 ply



44-3008LB



- High heat reflective handshield
- Split cowhide leather back with **fiber glass front**
- Extra heat resistant




KEVLAR® 5 ply

44-3009BF



- High heat reflective handshield
- **Black coated fiber glass back with fiber glass front**
- Heavy duty handshield for the toughest applications



KEVLAR® 5 ply

10-1099



- TIG finger
- For extra protection
- For extra stability in position welding
- Silica fabric
- With hook and loop

KEVLAR® 3 ply



10-1911/UL



- **10-1911/UL**
Repair & reinforcement kit for unlined gloves such as TIG welding, drivers and mechanic gloves.

- **10-2911/LI**
Repair & reinforcement kit for lined gloves such as stick or MIG welders, heavy duty work, heat resistant gloves.

Caution: For certified gloves, check ratings before operation. For non-certified gloves, owner is responsible to ensure proper protection before operation.

10-2911/LI

